

REDUCED FLUSH BUTTON

FULL FLUSH BUTTON

17" - 18"

FLOOR


**SPECIFICATIONS:**

- VITREOUS CHINA ADA COMPLIANT WALL MOUNTED FLUSH VALVE WATER CLOSET WITH FULLY GLAZED 2" TRAPWAY, ELONGATED SIPHON JET BOWL, 1.1/1.6 GALLONS PER FLUSH.
- SOLAR POWERED, WITH SENSOR ACTIVATED, SLOAN SOLIS ELECTRONIC /MANUAL, WITH BATTERY BACK UP DUAL FLUSH MODEL WATER CLOSET. FLUSHOMETER. DESIGN BASED ON SLOAN SOLIS 8111 - 1.6/1.1.
- CONCEALED FLOOR MOUNT SUPPORT. WALL BRACKETS SHALL NOT BE USED.
- WHITE SOLID PLASTIC OPEN FRONT ENLONGATED SEAT WITH EXTERNAL CHECK INTERGAL BUMPERS, LESS COVER.

KOHLER KINGSTON K-4330.

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-1	ADA - FLUSH VALVE WATER CLOSET	INTEGRAL	-	1"	4"	2"	WALL MOUNTED

ADA - WATER CLOSET

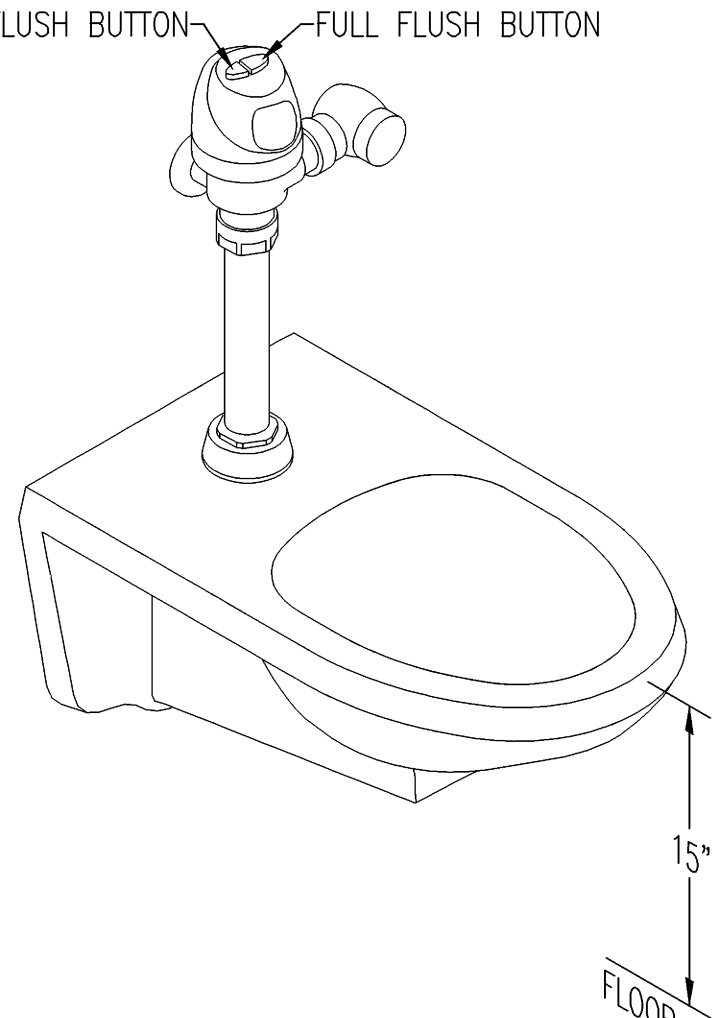

REDUCED FLUSH BUTTON

FULL FLUSH BUTTON

15"

FLOOR


**SPECIFICATIONS:**

- VITREOUS CHINA WALL MOUNTED FLUSH VALVE WATER CLOSET WITH FULLY GLAZED 2" TRAPWAY, ELONGATED SIPHON JET BOWL, 1.1/1.6 GALLONS PER FLUSH.
- SOLAR POWERED, WITH SENSOR ACTIVATED, SLOAN SOLIS ELECTRONIC /MANUAL, WITH BATTERY BACK UP DUAL FLUSH MODEL WATER CLOSET. FLUSHOMETER. DESIGN BASED ON SLOAN SOLIS 8111 - 1.6/1.1.
- CONCEALED FLOOR MOUNT SUPPORT WALL BRACKET SHALL NOT BE USED.
- WHITE SOLID PLASTIC OPEN FRONT ELONGATED SEAT WITH EXTERNAL CHECK INTERGAL BUMPERS, LESS COVER.

KOHLER KINGSTON K-4330.

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-2	FLUSH VALVE WATER CLOSET	INTEGRAL	-	1"	4"	2"	WALL MOUNTED

WATER CLOSET

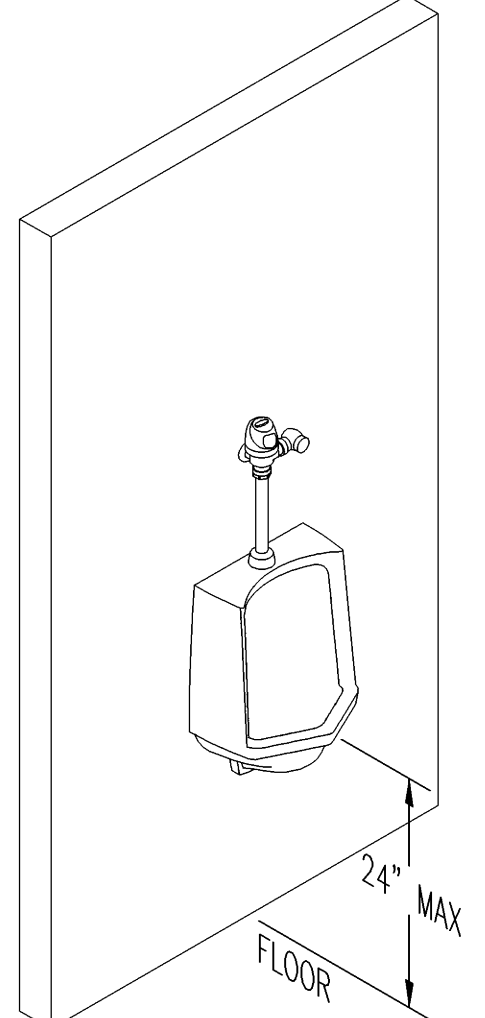

24" MAX

FLOOR


**SPECIFICATIONS:**

- COMPLETE HEU SYSTEM WITH SOLAR-POWERED, SENSOR OPERATED "OPTIMA PLUS" URINAL FLUSHOMETER AND VITREOUS CHINA URINAL. WALL HUNG VITREOUS CHINA, WASHDOWN FLUSHING ACTION, 3/4" I.P.S. TOP SPUD INLET, 2" I.P.S. SPUD OUTLET, ALL MOUNTING HARDWARE INCLUDED, INTEGRAL FLUSHING RIM, COMPATIBLE WITH SMITH CARRIER 06336 OR 0637. ADA COMPLIANT, A SLOAN HIGH EFFICIENCY ELECTRONIC 1/8 GPF FLUSHOMETER /MANUAL, WITH BATTERY BACKUP WILL BE SUPPLIED.
- CONCEALED FLOOR MOUNT SUPPORT. WALL BRACKETS SHALL NOT BE USED.
- MOUNTING HEIGHT 17" TO RIM MAXIMUM.

DESIGN BASED ON SLOAN MODEL "WEUS" 1002 1201 SOLIS SYSTEM.

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-3	FLUSH VALVE URINAL	INTEGRAL	-	3/4"	2"	1-1/2"	WALL

URINAL

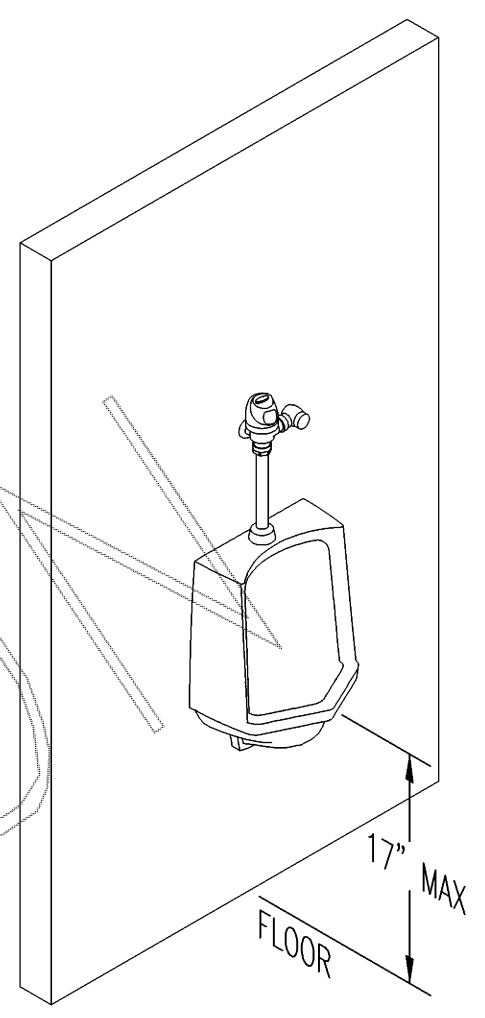

17" MAX

FLOOR


**SPECIFICATIONS:**

- COMPLETE HEU SYSTEM WITH SOLAR-POWERED, SENSOR OPERATED "OPTIMA PLUS" URINAL FLUSHOMETER AND VITREOUS CHINA URINAL. WALL HUNG VITREOUS CHINA, WASHDOWN FLUSHING ACTION, 3/4" I.P.S. TOP SPUD INLET, 2" I.P.S. SPUD OUTLET, ALL MOUNTING HARDWARE INCLUDED, INTEGRAL FLUSHING RIM, COMPATIBLE WITH SMITH CARRIER 06336 OR 0637. ADA COMPLIANT, A SLOAN HIGH EFFICIENCY ELECTRONIC 1/8 GPF FLUSHOMETER WILL BE SUPPLIED. ADA COMPLIANT.
- CONCEALED FLOOR MOUNT SUPPORT. WALL BRACKETS SHALL NOT BE USED.
- MOUNTING HEIGHT 17" TO RIM MAXIMUM.

DESIGN BASED ON SLOAN MODEL "WEUS" 1002 1201 SOLIS SYSTEM.

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-4	ADA - FLUSH VALVE URINAL	INTEGRAL	-	3/4"	2"	1-1/2"	WALL

ADA - URINAL

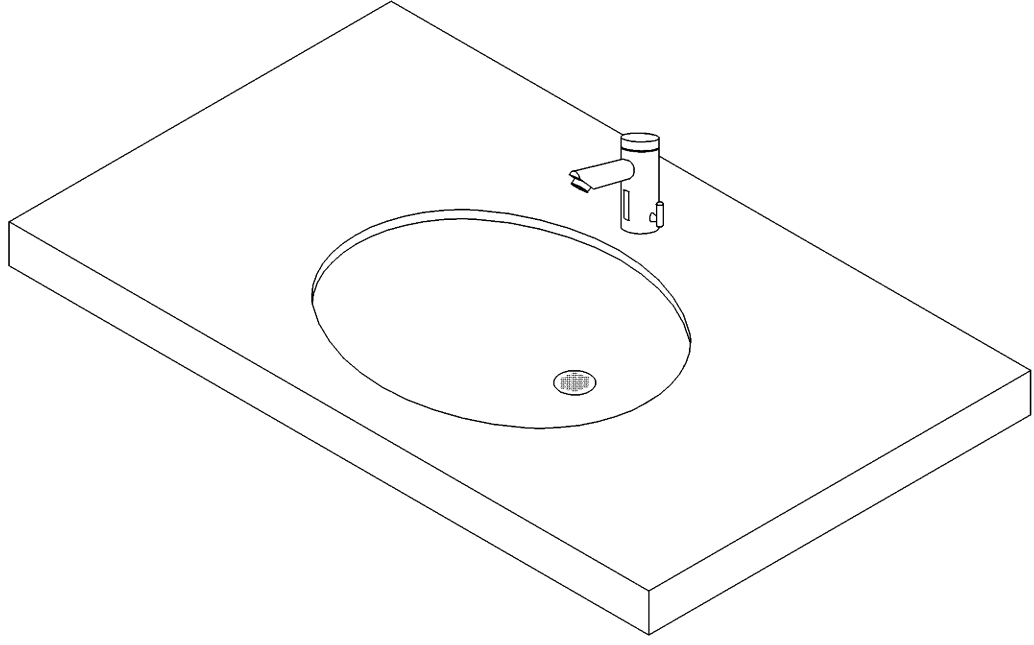


**SPECIFICATIONS:**

- VITREOUS CHINA UNDER MOUNT LAVATORY WITH FRONT OVERFLOW.
- SOLAR POWERED, SENSOR ACTIVATED ELECTRONIC HAND WASHING FAUCET FOR PRE TEMPERED OR HOT AND COLD WATER OPERATION 0.5 GPM AERATOR SPRAY HEAD. CHROME PLATED CONSTRUCTED METAL HAND WASHING FAUCET. EAF-275ISM-IC WITH INTEGRAL SPOUT TEMPERATURE MIXER AND I.Q.-CLICK FEATURE EAF-35-A FAUCET EXTENSION KIT.
- CHROME FINISH CAST BRASS LOOSE KEY ANGLE STOPS WITH CHROME FINISH RIGID SUPPLY RISERS. GRID STRAINER & ADJUSTABLE "P"-TRAP.

DETAIL BASED ON AMERICAN STANDARD, "OVALYN" SERIES.

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-5	UNDERMOUNT LAVATORY	"P"-TRAP	1/2"	1/2"	2"	1-1/2"	UNDER MOUNT

UNDERMOUNT LAVATORY

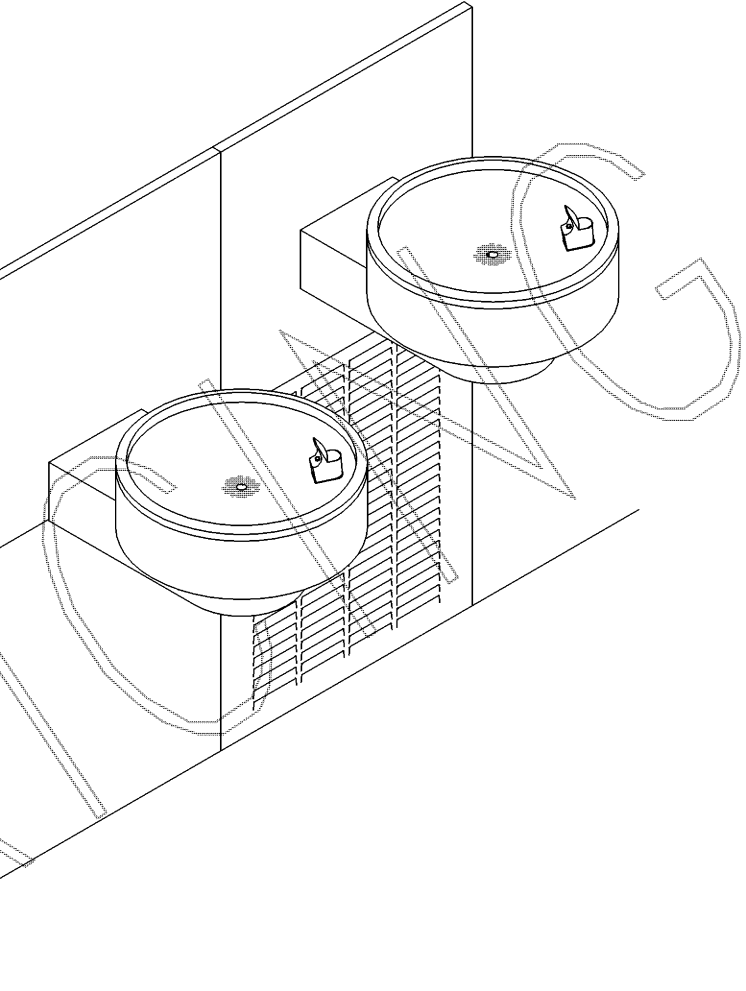


**SPECIFICATIONS:**

- TWO LEVEL WALL MOUNT STAINLESS STEEL FOUNTAIN WITH RECESSED REFRIGERATION SYSTEM WITH VANDAL RESISTANT BUBBLER, FRONT PANEL GRILL & WALL MOUNTING FRAME. LEAD FREE CONSTRUCTION WITH SATIN STAINLESS FINISH TO SUPPLY 8 GALLONS PER HOUR @ 50°F WITH 80°F ROOM TEMPERATURE.
- CHROME FINISH CAST BRASS LOOSE KEY ANGLE STOPS WITH CHROME FINISH RIGID SUPPLY RISERS. GRID STRAINER & ADJUSTABLE "P"-TRAP.
- MOUNT PER MANUFACTURERS INSTRUCTIONS FOR ADA COMPLIANCE.

DETAIL BASED ON ELKAY, "SWIRLFLOW" SERIES

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-6	ADA - DUAL BASIN ELECTRIC WATER COOLER	"P"-TRAP	-	1/2"	1-1/2"	1-1/2"	WALL MOUNTED

ADA - DUAL BASIN WATER COOLER

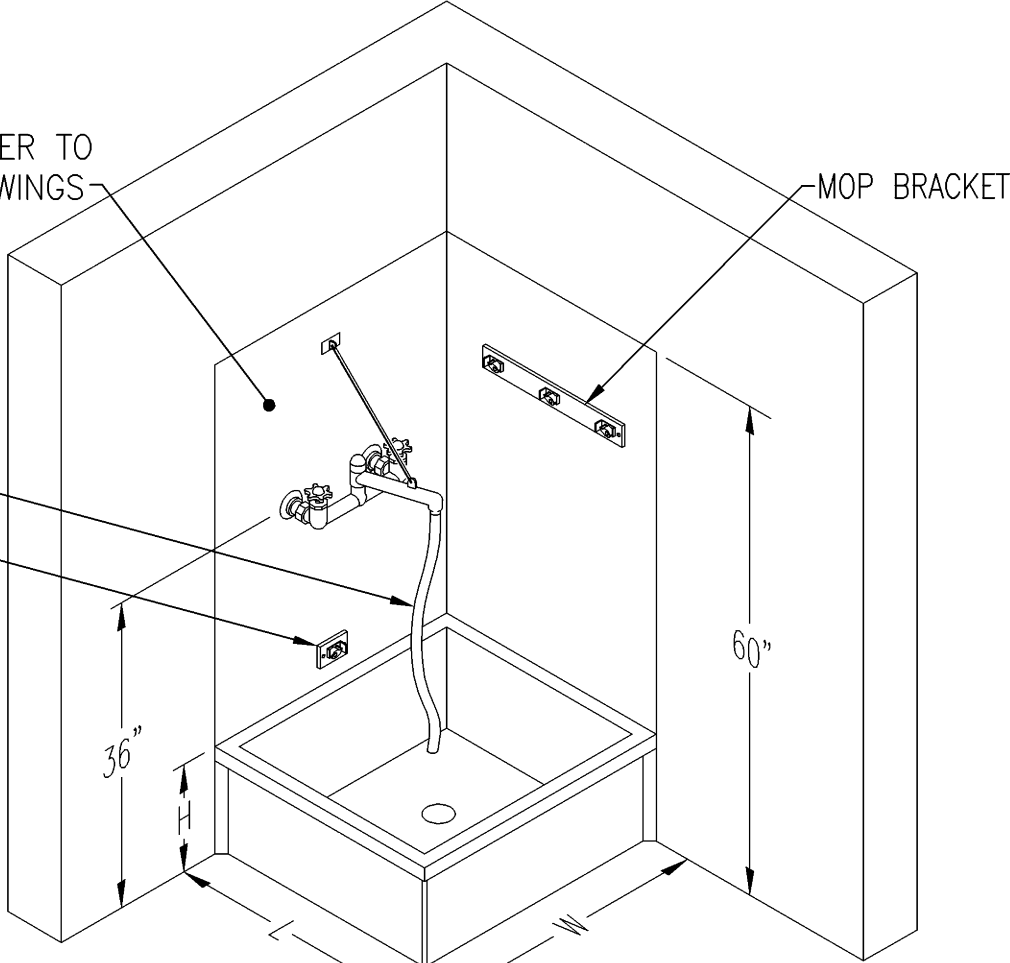

FIBER REINFORCED PLASTIC PANEL, REFER TO ARCHITECTURAL DRAWINGS

MOP BRACKET

30" HOSE

HOSE BRACKET

36"

60"


**SPECIFICATIONS:**

- MOP BASIN SHALL BE 24"Wx24"Lx10"H SINGLE PIECE MOLDED STONE.
- FAUCET SHALL BE EXPOSED YOKE WALL MOUNT UTILITY FAUCET WITH CAST BRASS BODY, 1/4 TURN CERAMIC VALVE CARTRIDGES, INTEGRAL VACUUM BREAKER & WALL BRACE. PROVIDE WITH OFFSET SHANKS WITH INTEGRAL STOPS.
- MOUNT FAUCET 36" AFF.
- PROVIDE WALL MOUNTED MOP BRACKET, STAINLESS STEEL STRAINER, QUICK DRAIN CONNECTIONS, 30" HOSE & HOSE BRACKET.

DETAIL BASED ON FIAT, "MOLDED STONE" SERIES

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-7	FLOOR MOUNTED MOP BASIN	"P"-TRAP	3/4"	3/4"	3"	1-1/2"	FLOOR

MOP BASIN

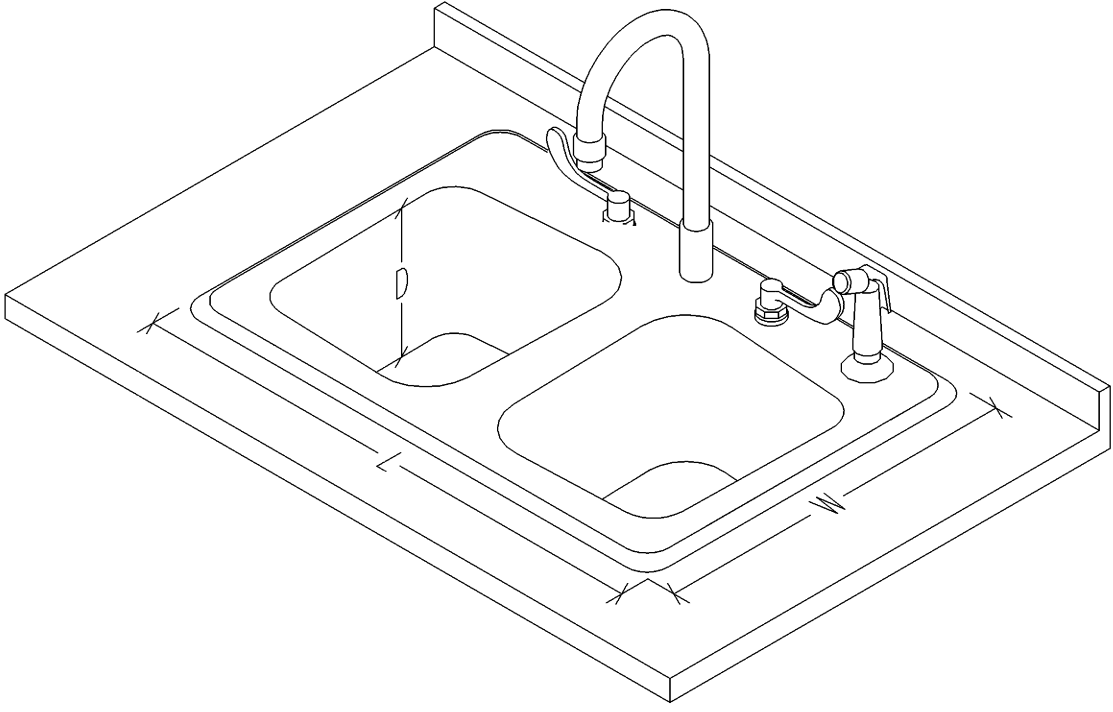

**SPECIFICATIONS:**

- SEAMLESS DIE DRAWN 18 GAUGE STAINLESS STEEL SINK WITH EXPOSED SURFACE POLISHED TO A NON-POROUS FINISH. FULLY COATED UNDERSIDE INSULATED FOR SOUND AND CONDENSATE.
- 8" CENTER, TWO HANDLE BELOW DECKMOUNT FAUCET, POLISHED CHROME PLATED FINISH TRIM, CAST BRASS BODIES, BRASS SPOUT AND TRIM, HEAVY DUTY RIGID/SWIVEL GOOSENECK SPOUT, STANDARD 2.2 GPM FLOW CONTROL AERATOR, 4" BLADE HANDLES, COLOR INDEX METAL HANDLES WITH VANDAL RESISTANT SCREWS AND WITH HOSE SPRAY, AS MANUFACTURED BY CAMBRIDGE BRASS.
- CHROME FINISH CAST BRASS LOOSE KEY ANGLE STOPS WITH CHROME FINISH RIGID SUPPLY RISERS. OFFSET GRID STRAINER AND ADJUSTABLE "P"-TRAP.

DETAIL BASED ON JUST, "STYLIST" GROUP

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-8	KITCHEN SINK (2 COMPARTMENT) [19"Wx25"Lx7-1/2"D]	"P"-TRAP	1/2"	1/2"	2"	1-1/2"	COUNTER TOP

KITCHEN SINK COUNTER TOP